VORTAC OSH	APP CRS	Rwy Idg	6179
111.8	090°	THRE	797
Chan 55		Apt Elev	808

VOR RWY 9

WITTMAN RGNL (OSH)

Circling to Rwy 5, 23, and 31 NA at night. When local altimeter setting not received, use Fond Du Lac altimeter setting and increase all MDA 40 feet and increase S-9 Cats C and D visibility and Circling Cat C visibility ⅛ mile and Circling Cat D visibility ¼ mile, increase CETOL fix minimums Circling Cat D visibility ¼ mile. VDP NA with Fond Du Lac altimeter setting. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 3000 on OSH VORTAC R-111 to LEWKO INT/OSH 15.1 DME and hold.

ATIS	MILWAUKEE APP CON	OSHKOSH TOWER ★	GND CON	UNICOM
125.9	127.0 263.075	118.5 (CTAF) L 290.9	121.9	122.95

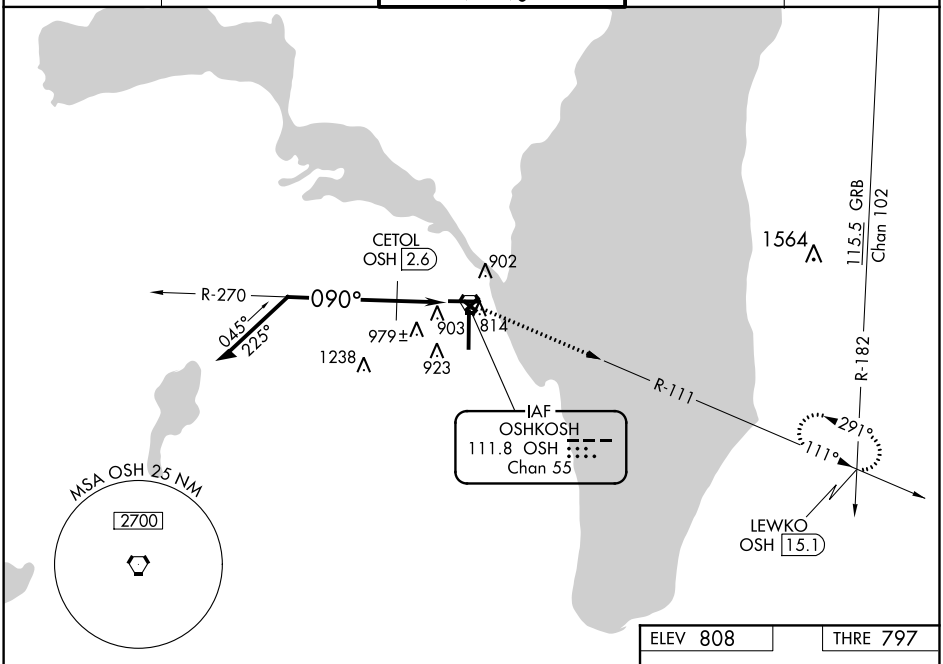

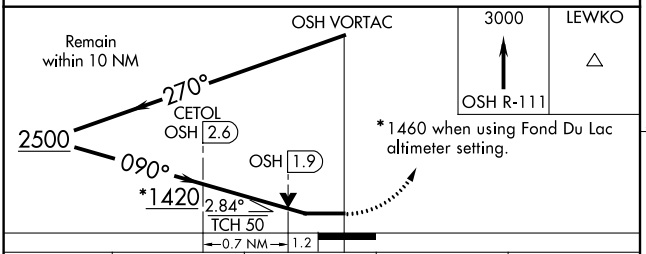

CATEGORY	A	B	C	D
S-9	1420-1	623 (700-1)	1420-1¾	623 (700-1¾)
CIRCLING	1420-1	612 (700-1)	1420-1¾ 612 (700-1¾)	1440-2 632 (700-2)
CETOL FIX MINIMUMS				
S-9	1240-1	443 (500-1)	1240-1⅜	443 (500-1⅜)
CIRCLING	1280-1 472 (500-1)	1300-1 492 (500-1)	1360-1½ 552 (600-1½)	1440-2 632 (700-2)

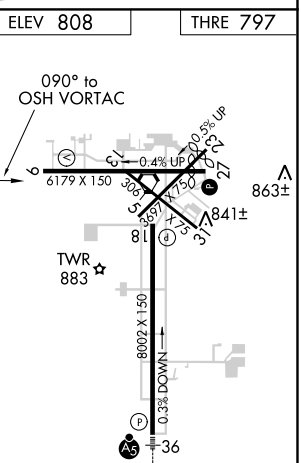

EC-3, 26 JUN 2014 to 24 JUL 2014
EC-3, 26 JUN 2014 to 24 JUL 2014